


# crosswater<sup>x</sup>

LUXURY DOUCHE KIT

SH935C SH935CG  
SH936C SH936CG

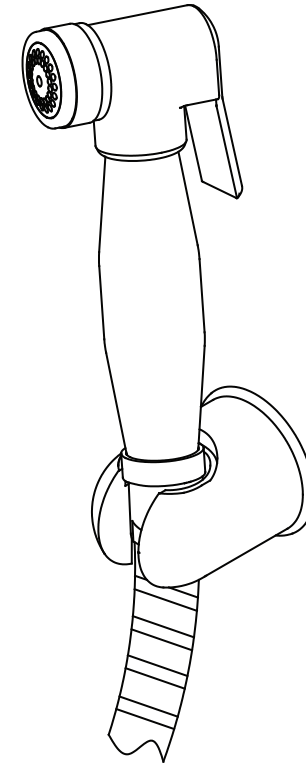

For any further information please contact  
Crosswater on: **01322 628270**

Or visit our web-site at [www.crosswater.co.uk](http://www.crosswater.co.uk)

The manufacturer reserves the right to make technical  
modifications without prior notice.

INSTALLATION INSTRUCTIONS

# crosswater<sup>x</sup>

## INTRODUCTION

**Please read these instructions carefully and keep in a safe place for future reference.**

#### General Installation Requirements

The installation must comply with regulations of the Local Water Authority as contained in their bylaws.

All of the douches in this range are single feed the hot and cold water needs to be mixed in a thermo valve.

It is very important that all pipework is flushed thoroughly after installation to avoid damage.

#### Minimum/Maximum working pressure

The douches are suitable for high and low pressure.

To ensure that it works adequately under low pressure, the cold water storage tank should be at least 1 meter above the highest installed position. The maximum suggested pressure at the handset is 2 bar.

For installations where the pressure exceeds this a pressure reducing valve should be used.

#### Approvals

All products are manufactured using materials tested and approved under the Water Bylaws Scheme and comply with requirements of British Standard 5412: 1996 where applicable.

#### WARNING


**Before installing the douche it is essential that you thoroughly flush through the supply pipes in order to remove any remaining swarf, solder or other impurities.**

**Failure to carry out this simple procedure could cause problems or damage to the workings.**

These hints have been prepared for your guidance, you must exercise due care at all times.

We do not accept responsibility for any problems that may occur through incorrect installation.

## DIMENSIONS

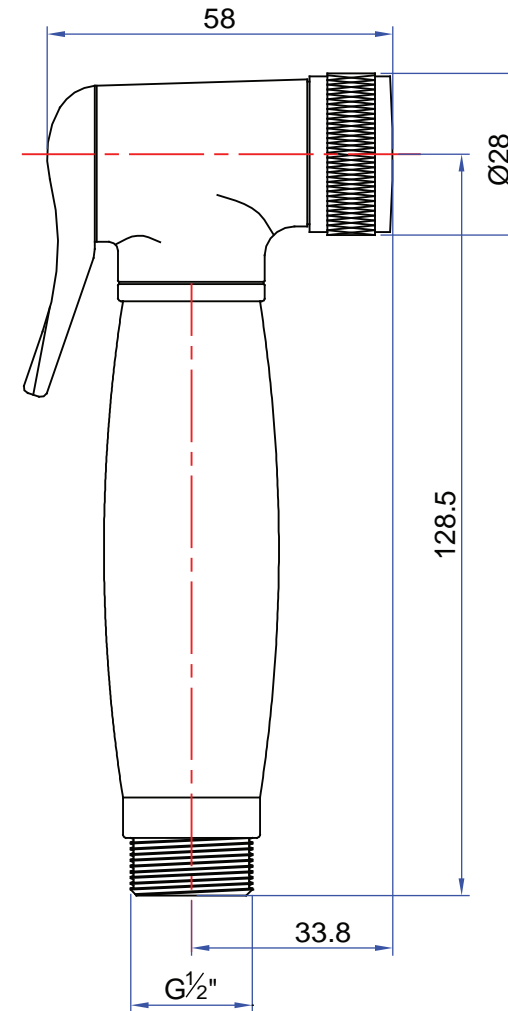

NOTE: ALL DIMENSIONS IN MILLIMETRES

