

Ecostat

Ecostat Universal thermostatic shower mixer for exposed installation

Surfaces: **chrome** Art. no. : **13122000**



Description

product features

- designed to run 1 outlet
- thermostat cartridge, ceramic valve 180°
- safety stop at 40°C
- maximum temperature can be adjusted on installation
- flow rate hand shower connection at 3 bar: 30 l/min
- operating pressure: min. 1 bar / max. 10 bar
- Ecostop button limits the water consumption to 10 l/min
- non-return valve
- centre distance: 150 mm ± 12 mm
- exposed design allows easy installation, all working parts are outside of the wall
- noise class: I
- flow rate class: B
- WRAS 1001308

Article Details

Price excl. VAT

£ 136.25

Technology




Certificates



Product image



Scale drawing

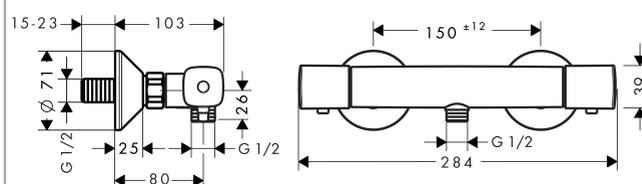

Ecostat

Ecostat Universal thermostatic shower mixer for exposed installation

Surfaces: **chrome** Art. no. : **13122000**



Flowchart

