


INSTALLATION INSTRUCTIONS

RECESSED SHOWER NICHE

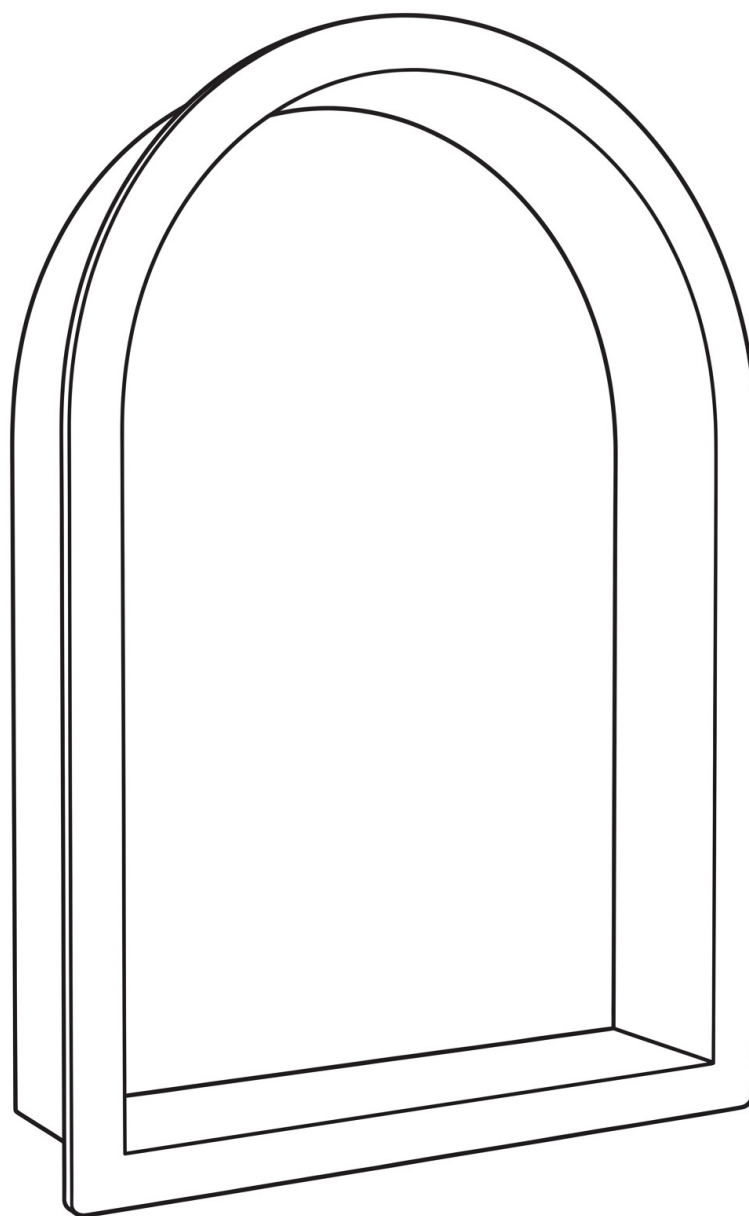

WARNING

EN

Cement residue removers often contain aggressive chemicals. These can damage the surface of the recessed niche. After using tile and grout cleaners, please rinse the drain thoroughly. Do not use abrasive cleaning agents and/or sharp or scratching objects for cleaning. Do not place corrosive products, such as steel or aluminium aerosol cans, directly on the stainless steel surface.

Care & Maintenance

After installation, aggressive substances such as sealants, adhesives and mortar may cause yellow staining or become trapped in the surface finish, creating unsightly residue that can damage the surface.

- Clean the niche regularly with warm water, a soft microfiber cloth and, if necessary, mild soap.
- Rinse and clean the niche using warm water only. Avoid hard or highly mineralised water.
- Remove any remaining material, adhesive and mortar residues. Thoroughly clean the surface and all accessories.
- In order to prevent scratches, clean by wiping in the direction of the grain (groove pattern).
- Do not use abrasive cleaners, alcohol-based products, detergents, bleach-containing products, aggressive chemicals, abrasive sponges, or harsh polishes on the surface. The use of such products may void the warranty.
- When using chlorinated bleach cleaners in the shower, ensure they do not come into contact with the holder's surface and promptly remove any residues from the surface.




Acidic cleaners



Bleach




Aggressive cleaners



NO Abrasive tools


INBOUWNIS • RECESSED SHOWER NICHE

Model 30x30 cm

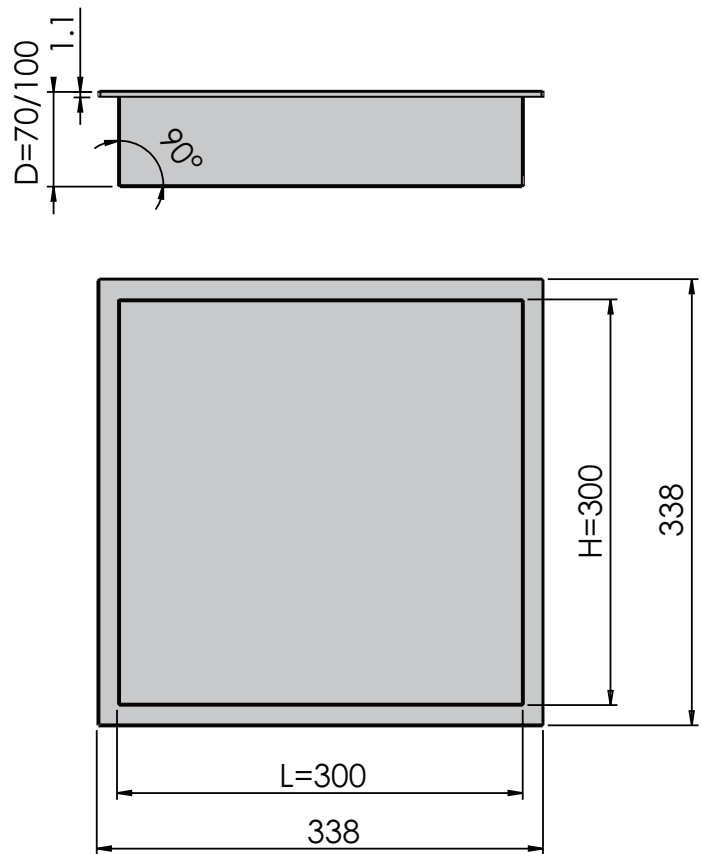


Size LxHxD/mm	Suggest Hole Size on Wall LxHxD/mm
300x300x70/85/100	305x307x69/84/99
600x300x70/85/100	605x307x69/84/99
302.2x448.5x100	307.2x455.5x99

Model 32.8x47.8 cm

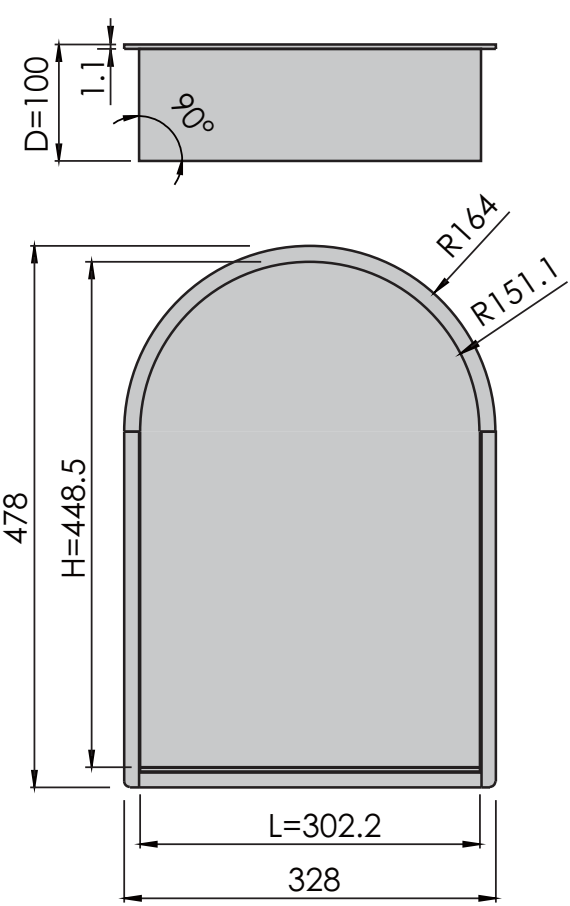


Model 60x30 cm

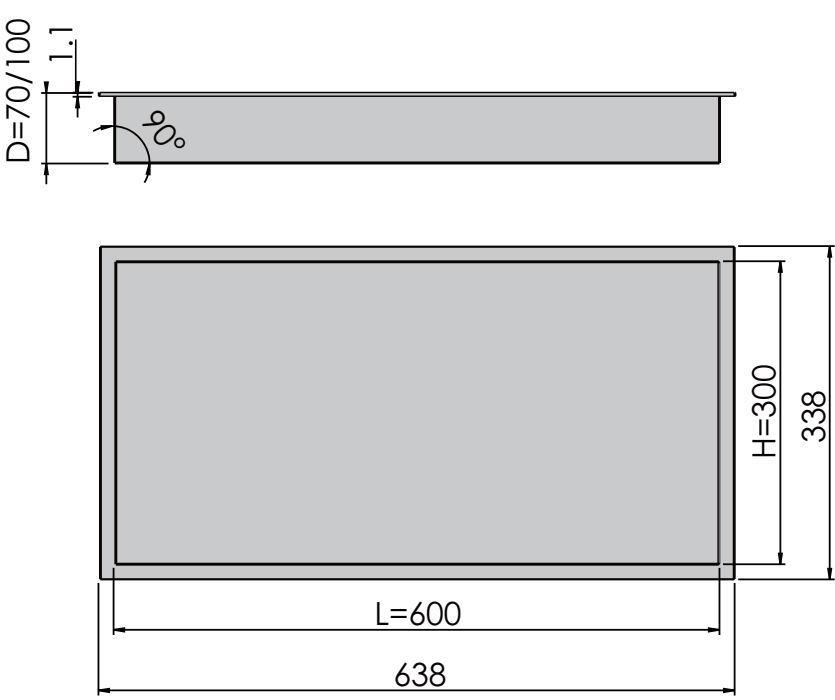


Wall Niche Installation Instructions

Step 1

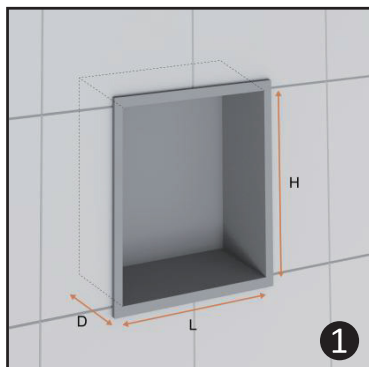


- EN Prepare a wall opening that is slightly larger than the dimensions of the wall niche. Ensure that the opening is slightly larger than the body of the wall niche; refer to the table for exact dimensions.
- NL Maak een wand opening die iets groter is dan de afmetingen van de wand nis. Zorg ervoor dat de opening iets groter is dan het lichaam van de wand nis; raadpleeg de tabel voor de exacte afmetingen.
- FR Réalisez une ouverture murale légèrement plus grande que les dimensions de la niche murale. Assurez-vous que l'ouverture soit un peu plus grande que le corps de la niche murale; consultez le tableau pour les dimensions exactes.

Step 2

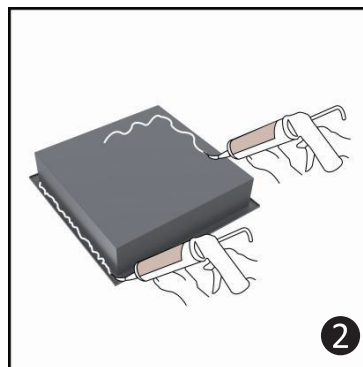


- EN Apply silicone sealant to the back of the wall niche and also apply additional sealant around the rear flange.
- NL Breng siliconenkit aan op de achterzijde van de wand nis en breng extra kit aan rondom de achterste flens.
- FR Appliquez du mastic silicone à l'arrière de la niche murale et ajoutez-en également autour de la bride arrière.

Step 3

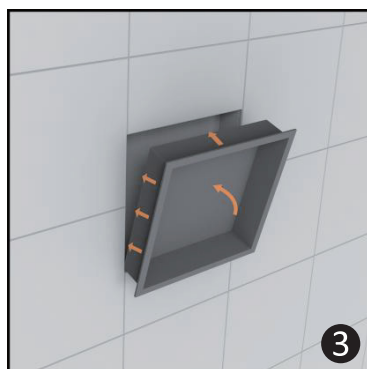

- EN Insert the wall niche into the wall opening prepared in Step 1 and secure it firmly in place.
- NL Plaats de wand nis in de wand opening uit stap 1 en fixeer deze stevig op zijn plaats.
- FR Insérez la niche murale dans l'ouverture murale réalisée à l'étape 1 et fixez-la solidement en place.

Step 4

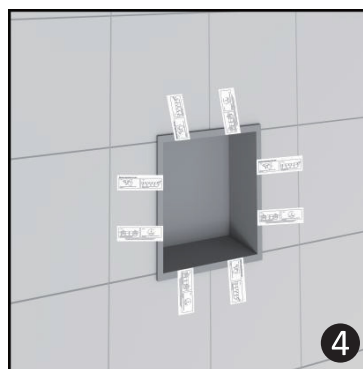

- EN Apply adhesive tape to the flange to prevent the wall niche body from moving out of position. Allow to dry for 24 hours.
- NL Breng afplak tape aan op de flens om te voorkomen dat het lichaam van de wand nis uit positie verschuift. Laat 24 uur drogen.
- FR Appliquez du ruban adhésif sur la bride pour empêcher le corps de la niche murale de se déplacer hors de sa position. Laissez sécher pendant 24 heures.