



**Eclairage LED Pinge 50**

**SKU 933101**

PHOTO:



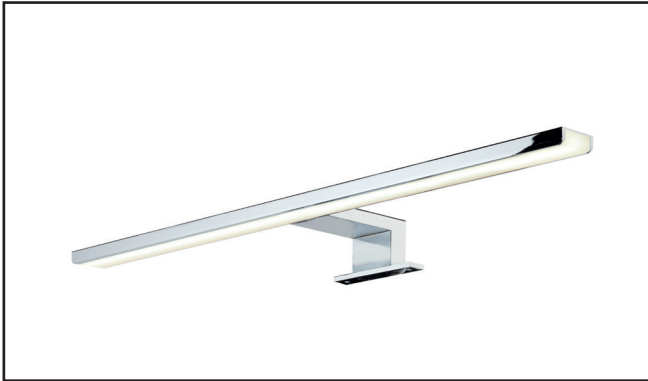







SCHÉMA:

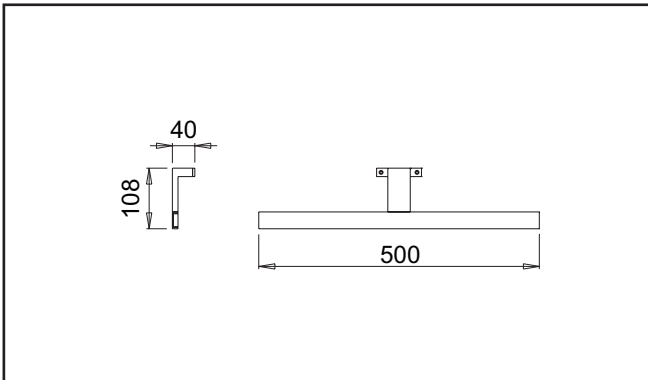

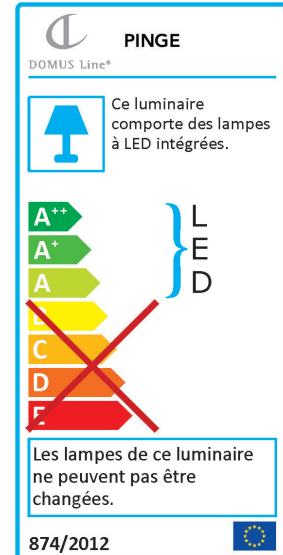

LABEL ÉNERGÉTIQUE:



<b>Type éclairage</b>	éclairage LED
<b>Fixation</b>	au-dessus d'une armoire ou d'un miroir
<b>Finition</b>	chromé
<b>Lumen</b>	640 lm
<b>Watt</b>	8W
<b>Kelvin</b>	3000°K
<b>Volt</b>	220-240V
<b>IP</b>	IP44
<b>Longueur câble d'alimentation</b>	800 mm
<b>Transfo</b>	raccordement direct au réseau 230V, pas besoin de transfo
<b>Certificats</b>	   <b>IP44</b> 
<b>Poids net</b>	350 g
<b>Garantie</b>	5 ans
<b>Extra</b>	

 The CE mark indicates that the product is conforming and satisfies all the community directives that are applicable; it guarantees the right of this product to be freely commercialized in all the states members of the European Union.

 Insulation degree II: Appliances in which electric shock protection is provided, in addition to the basic insulation, by further or reinforced insulation (also known as double insulation). In this case, the appliance does not need to be connected to the mains.

 Protection degree F: Appliances bearing the F symbol may be installed directly on normally inflammable surfaces. Normally inflammable surfaces are defined as surfaces made from materials such as wood or wood derivatives and which are more than 2 mm thick.

**IP44** Protection degree IP44: Protected against solid objects greater than 1 mm. Protected against splashing water.

 Inside use.