

Heated towel dryer

Thank you for purchasing this product. Please read the instructions and warnings carefully beforehand to ensure safe and satisfactory use of this product.

Fitting instructions

You will need a power drill, 6mm masonry drill bit, medium cross-head screwdriver, tape measure, spirit level and a pencil to install this product. Ensure the wall surface is of suitable strength and construction. Use appropriate wall plugs and drill bit. If in doubt, consult a qualified person.

Care and safety

Wear suitable eye protection when drilling. When using power tools near water - for added protection against electric shock the use of a residual current device is advised.

Beware of hidden pipes or power cables. Take care when drilling on glazed tile surfaces in case the drill slips.


Warnings

This product should be fitted in accordance with the manufacturer's fitting instructions.

Cleaning




Clean with a soft cloth or chamois leather moistened with water, or for stubborn marks with a mild solution of water and washing up liquid. Do not use scourers or cleaning agents containing abrasives such as powder cleaners, as these will damage the surface finishes.

Cable instructions:
 Brown wire = Live
 Blue = Neutral
 Green & Yellow = Earth

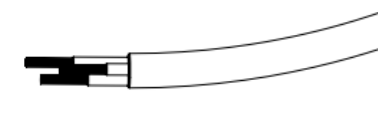

Part List:

- A. 3 M4x30mm screw
- B. 3 M6 expander
- C. 2 M5x6mm screw
- D. 1 Aluminum fixture
- E. 1 Plastic fixture
- F. 1 Silicon pad
- G. 1 3-pole terminal

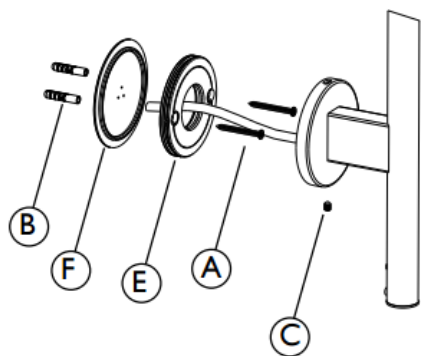



1. Check if the top and bottom bracket are in line before installing.
2. Position the bottom bracket to the power supply.
3. Put the unit against the wall and make sure it is vertical to the floor by the levels.
4. Marking the position of top bracket and bottom bracket by a pencil or marker pen.
5. Drill the holes with M6 drill.
6. Hammer the plastic expander into the wall and fix the aluminium part at the top by a M4x30mm screw.
7. Lead wire through the silicon pad and fix the plastic fixture at the bottom by 2 M4x30mm screws.
8. Connect the wires by terminals. Make sure the right color of wires matches.
9. Fix the top bracket and bottom bracket by a M5x6mm screw.

Disconnect or turn off electricity while fitting towel rail
 If in doubt consult a qualified electrician

Rosani ONE
Elektrische Handdoekradiator
170cm hoog - 30Watt

On/Off Switch Operation

- A. A. Press the On/Off switch at the top of the product. B. The indicator at the top is lightened on. The product starts working.

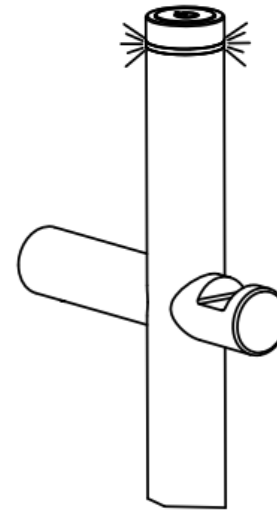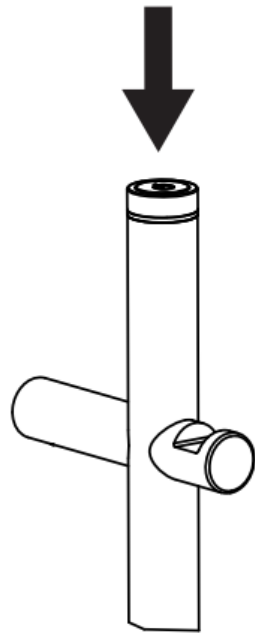

A. A. Press the On/Off switch at the top of the product. B. The indicator at the top is turned off. The product stop working.

