

Measurements in millimetres mm

Information updated May 2019

Tel 0345 873 8840

crosswater[™]

TECHNICAL



GLIDE II LED LIT MIRROR

Landscape ONLY

GL6080



PIR sensor
on/off switch





Heated
demister pad



LED lighting



Charging/
shaver socket

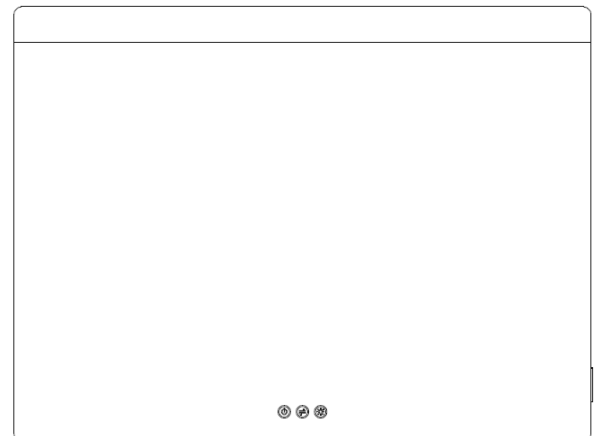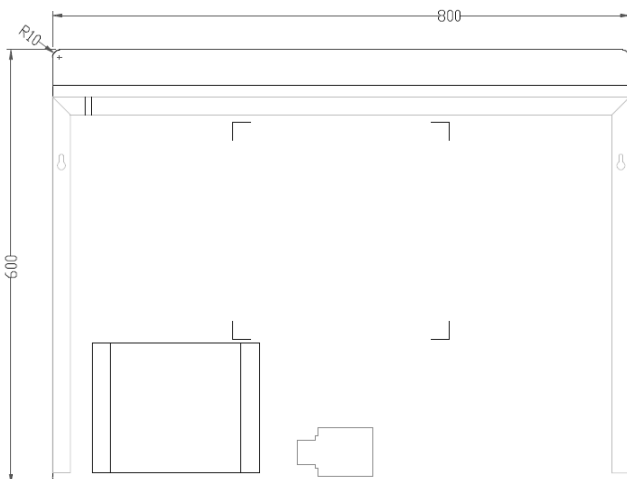

5mm mirror glass with safety film backing

One touch to change the temperature of the light

Charging socket to EN61558-2-5

Demister 310x450mm - 21w

Adjustable light temperature from 3000K (warm white) to 6000K (daylight)

IP44 RATED CLASS I rated

Dimable

CODE No	ITEM	LED WATTAGE	DRIVER WATTAGE	DE-MIST WATTAGE	LAMP QTY	LIGHT COLOUR	COLOUR TEMP	LUMINOUS EFFICACY	COLOUR RENDERING INDEX (CRI)	Charging Socket	Charging Socket
		W	W	W			K	lm/W	Ra	mA	Standard
GL6080	GLIDE II	5.1	6	22	96	Multiwhite	3000-6500k	85	85	80	IEC61558-2-5:10


Measurements in millimetres mm

Information updated May 2019

Tel 0345 873 8840

crosswater[™]

TECHNICAL

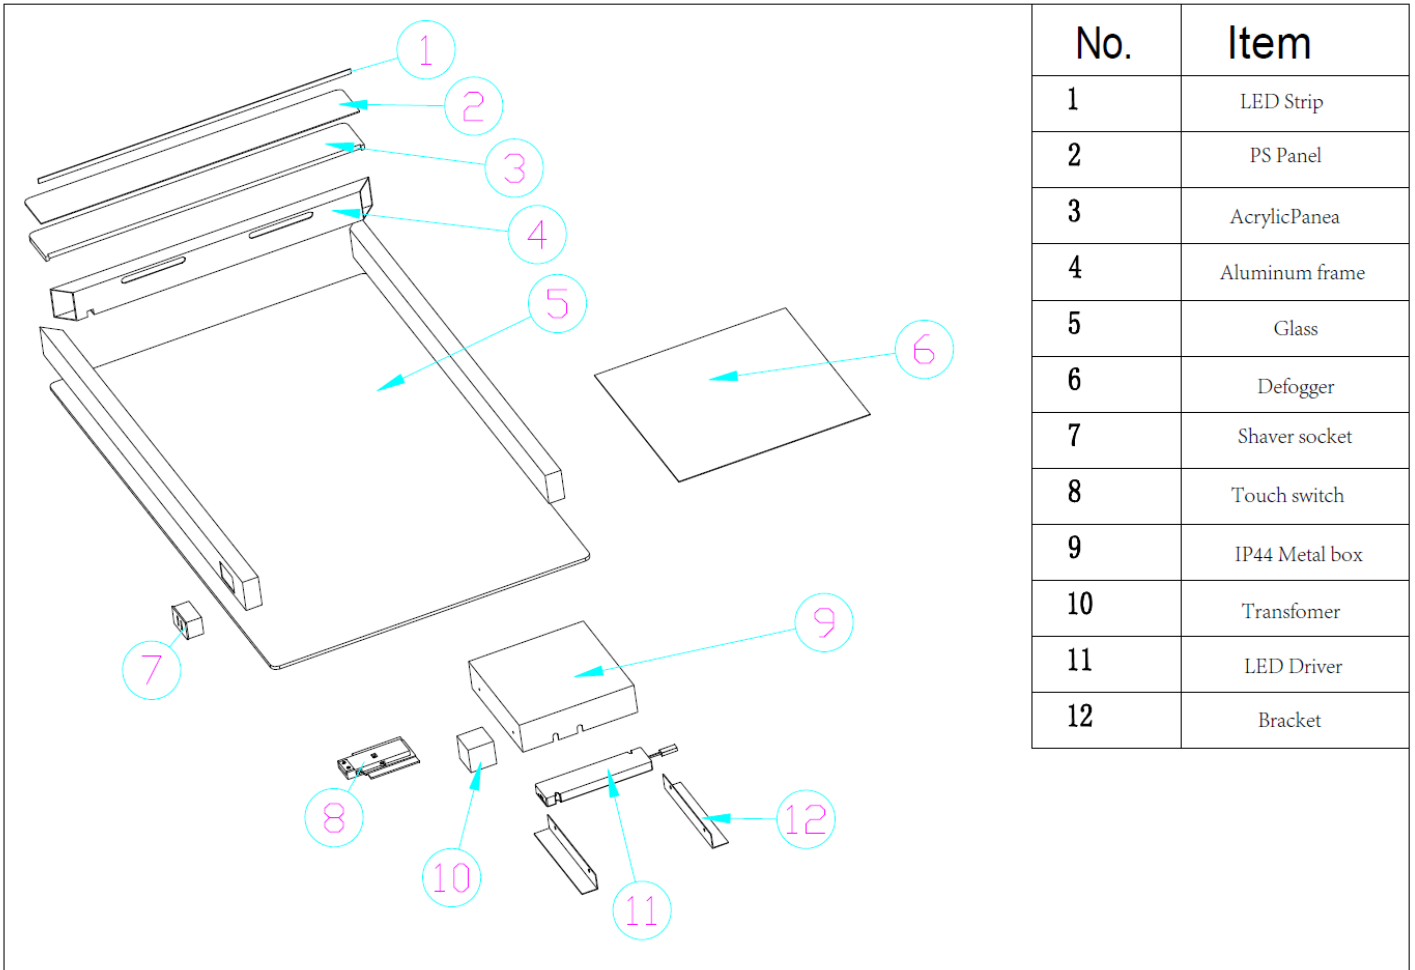

No.	Item
1	LED Strip
2	PS Panel
3	Acrylic Panea
4	Aluminum frame
5	Glass
6	Defogger
7	Shaver socket
8	Touch switch
9	IP44 Metal box
10	Transformer
11	LED Driver
12	Bracket

GLIDE II LED LIT MIRROR

Landscape ONLY

GL6080