


## TECHNISCHE FICHE

### Rechte koppeling F

#### Voorstelling

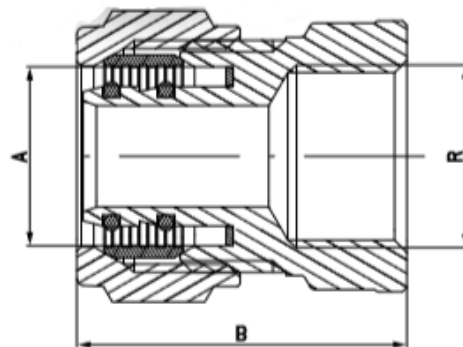

#### Technische kenmerken:

- Maximale werkdruk: 10 bar
- Maximale temperatuur: 95°C
- Draad: ISO 228

#### Omschrijving en beschikbare diameters

VM ref	Omschrijving	A	R	B
718211	TUBIPEX ALU RECHTE KOPP. 16*2 X 1/2F P/ST	16	1/2	37
718210	TUBIPEX ALU RECHTE KOPP. 16*2 X 3/4F P/ST	16	3/4	39,5
718212	TUBIPEX ALU RECHTE KOPP. 20*2 X 1/2F P/ST	20	1/2	37,5
718213	TUBIPEX ALU RECHTE KOPP. 20*2 X 3/4F P/ST	20	3/4	40
718214	TUBIPEX ALU RECHTE KOPP. 26*3 X 3/4F P/ST	26	3/4	41
718215	TUBIPEX ALU RECHTE KOPP. 26*3 X 4/4F P/ST	26	4/4	45,5
718216	TUBIPEX ALU RECHTE KOPP. 32*3 X 4/4F P/ST	32	4/4	50

## Types verpakkingen en hoeveelheden

VM ref	Omschrijving	Stuk	Zak-verpakking	Karton-verpakking
718211	TUBIPEX ALU RECHTE KOPP. 16*2 X 1/2F P/ST	1	10	200
718210	TUBIPEX ALU RECHTE KOPP. 16*2 X 3/4F P/ST	1	10	180
718212	TUBIPEX ALU RECHTE KOPP. 20*2 X 1/2F P/ST	1	10	150
718213	TUBIPEX ALU RECHTE KOPP. 20*2 X 3/4F P/ST	1	10	150
718214	TUBIPEX ALU RECHTE KOPP. 26*3 X 3/4F P/ST	1	5	100
718215	TUBIPEX ALU RECHTE KOPP. 26*3 X 4/4F P/ST	1	5	80
718216	TUBIPEX ALU RECHTE KOPP. 32*3 X 4/4F P/ST	1	5	50