

Measurements in millimetres mm

Information updated May 2019

Tel 0345 873 8840

crosswaterTM

TECHNICAL



GLIDE II LED LIT MIRROR

Portrait ONLY

GL5080



PIR sensor
on/off switch





Heated
demister pad



LED lighting



Charging/
shaver socket

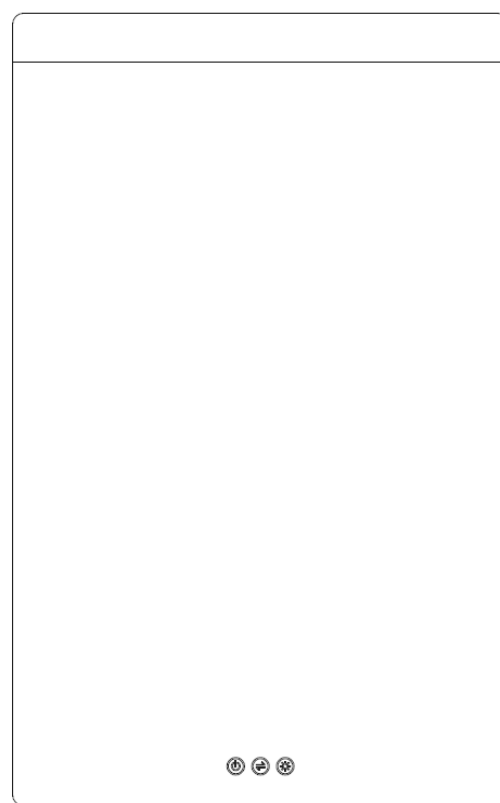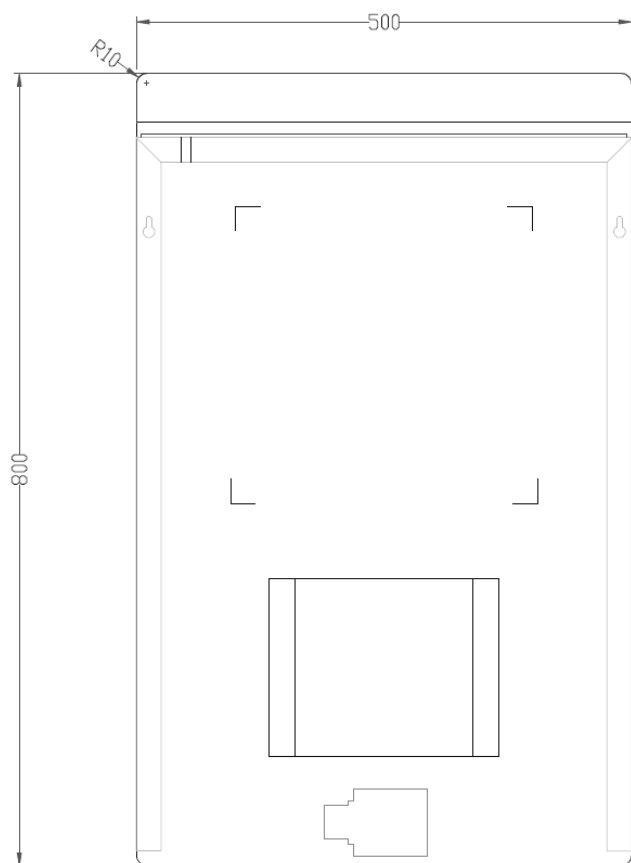

CODE No	ITEM	LED WATTAGE	DRIVER WATTAGE	DE-MIST WATTAGE	LAMP QTY	LIGHT COLOUR	COLOUR TEMP	LUMINOUS EFFICACY	COLOUR RENDERING INDEX (CRI)	Charging Socket	Charging Socket
		W	W	W			K	lm/W	Ra	mA	Standard
GL5080	GLIDE II	3.2	6	22	60	Multiwhite	3000-6500k	85	85	80	IEC61558-2-5:10

Measurements in millimetres mm

Information updated May 2019

Tel 0345 873 8840

5mm mirror glass with safety film backing

One touch to change the temperature of the light


Charging socket to EN61558-2-5

Demister 310x450mm - 2lw

Adjustable light temperature from 3000K (warm white) to 6000K (daylight)

IP44 RATED CLASS I rated

Dimable

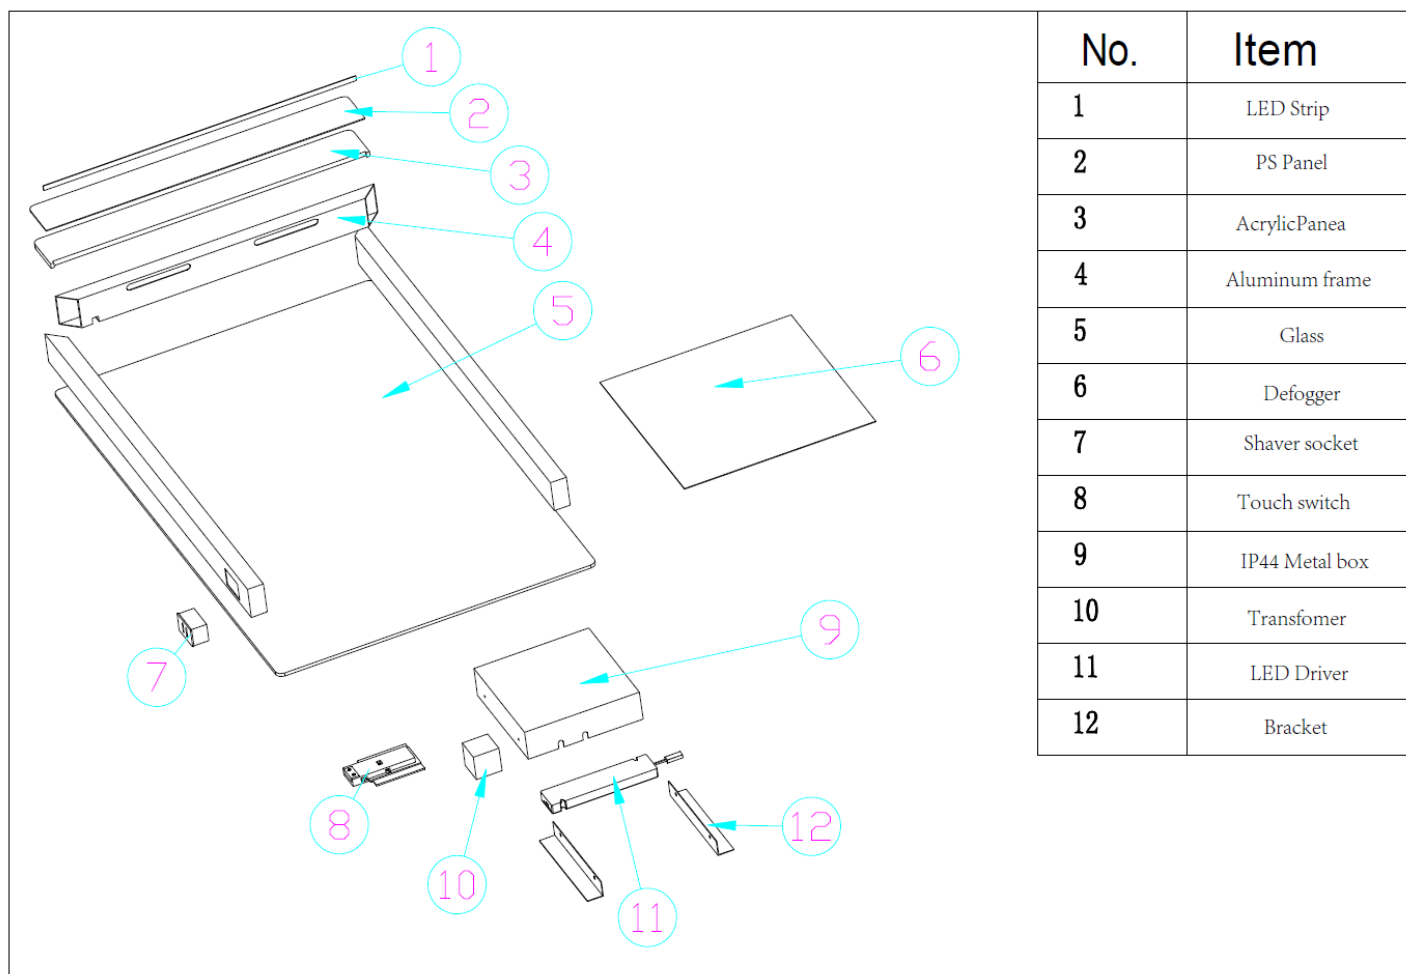

GLIDE II LED LIT MIRROR

Portrait ONLY

GL5080