



INSTALLATION INSTRUCTIONS

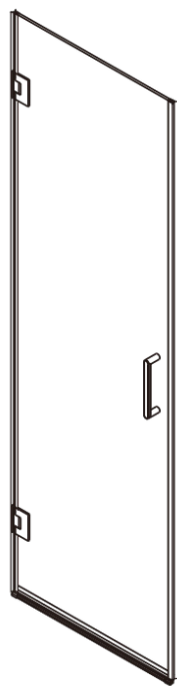

fortifura

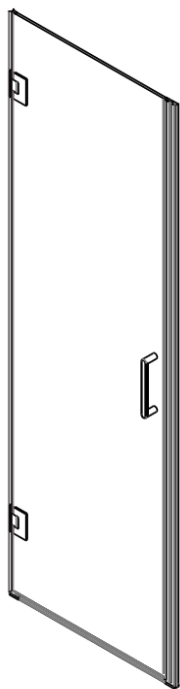

GENERAL INFORMATION

Please inspect the product immediately upon receipt for transit damage, missing packs/parts or manufacturing fault. Damage reported later cannot be accepted. Please handle the product with care avoiding knocks and shock loading to all sides and edges of the glass.

NOTES: Safety glass can not be re-worked

Please read these instructions carefully before start of installation.

Special care should be taken when drilling walls to avoid hidden pipes or electrical cables.


Note: This product is heavy and may require two people to install.

AFTERCARE INSTRUCTIONS

After use, your shower should be cleaned with soap and water. This is particularly important in hard water districts where insoluble lime salts may be deposited and allowed to build up. Cleaners of a gritty or abrasive nature should not be used. Care should be taken to avoid contact with strong chemicals such as organic solvents and strippers.

Glass cleaners can be used but with caution, if in doubt contact the manufacturer of the cleaner in question.

Please keep these instructions for aftercare and customer service details.

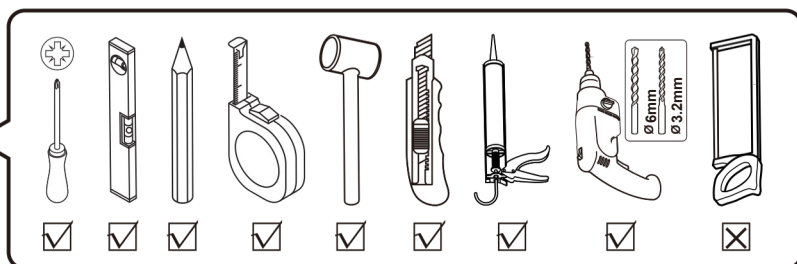



Recessed Shower Door
with magnetic seal



P 03




Recessed Shower Door
with bulb seal


P 12

Recessed Shower Door with magnetic seal


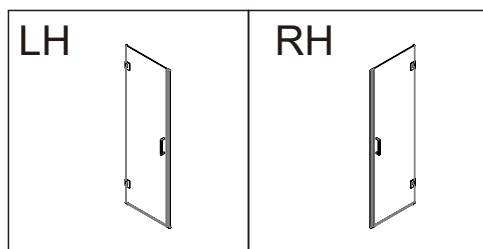
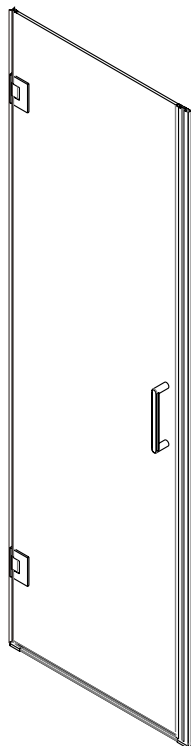


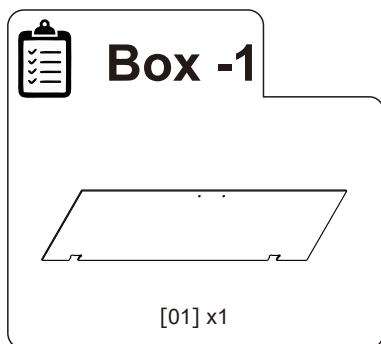


OR

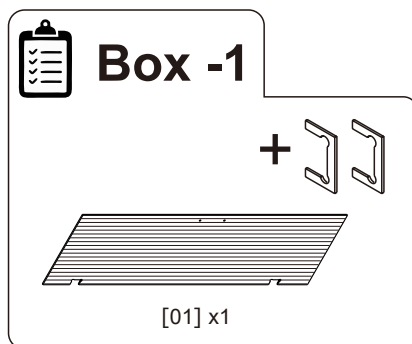

 **Not used for recessed shower door with magnetic seal assembly**

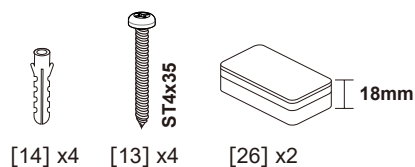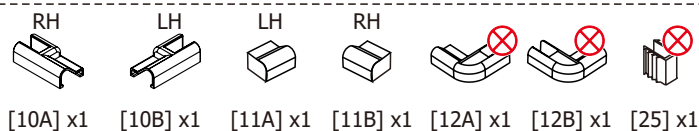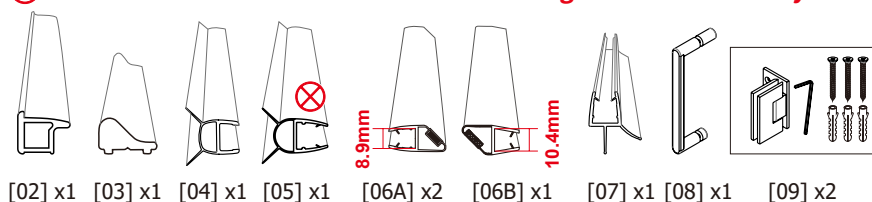


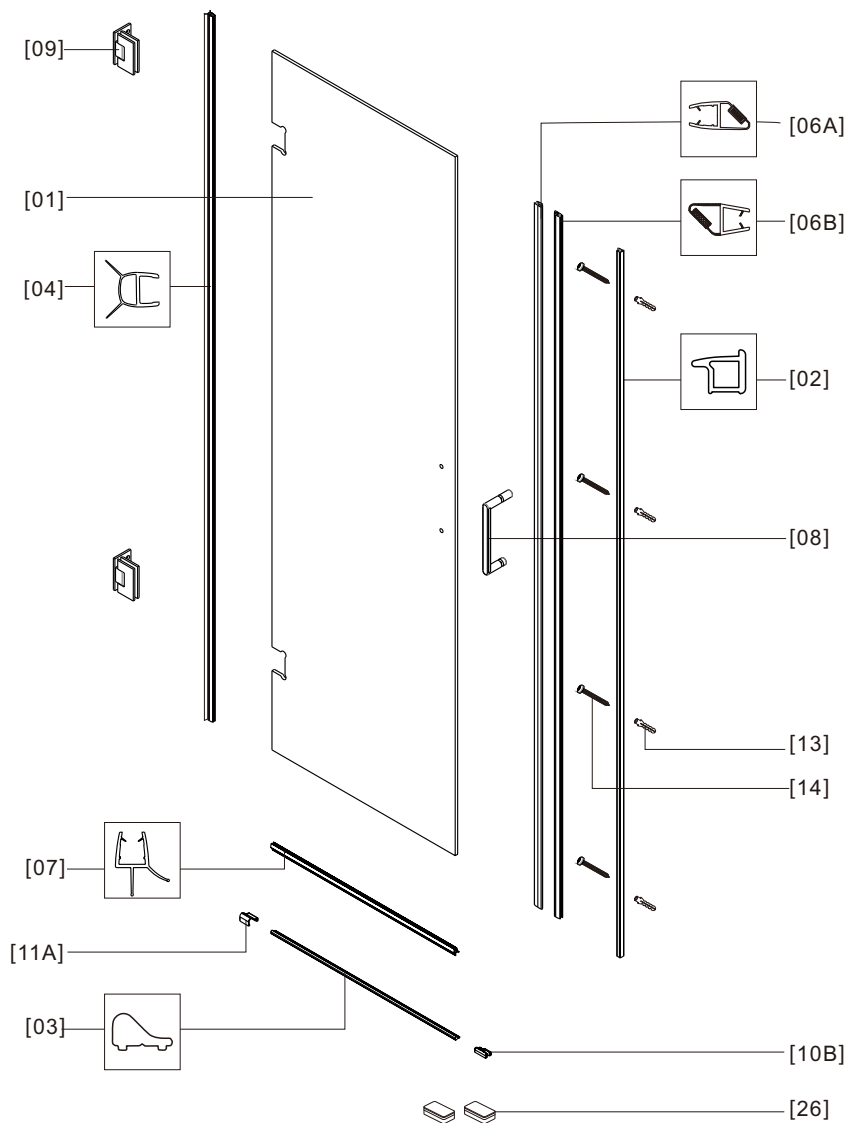




01


Size (mm)	L	
	Min.	Max.
600	600	600
700	700	700
800	800	800
900	900	900
1000	1000	1000

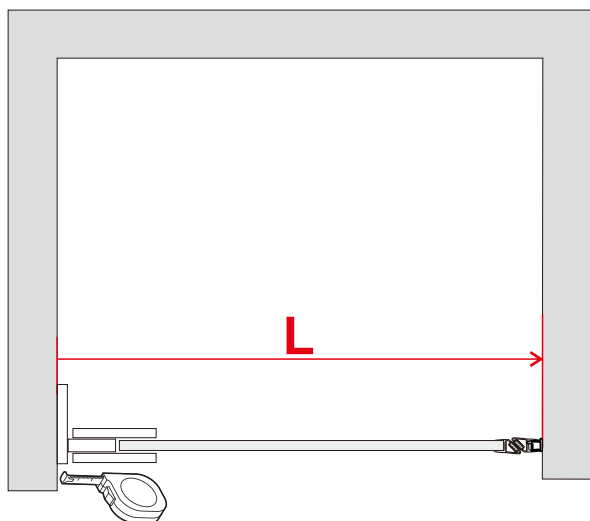



02

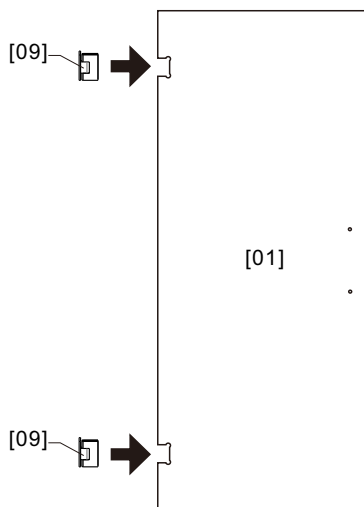

2x

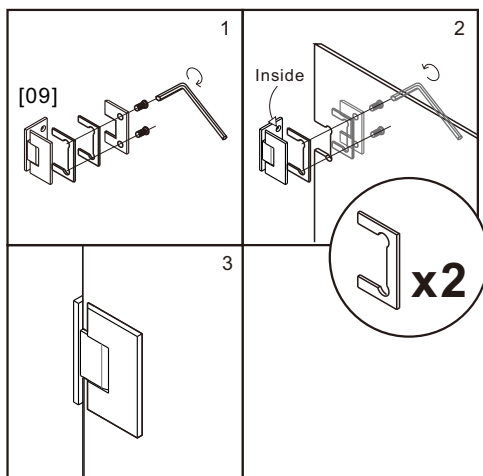



OR

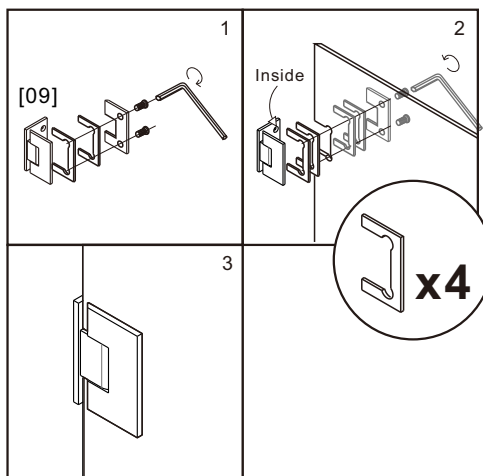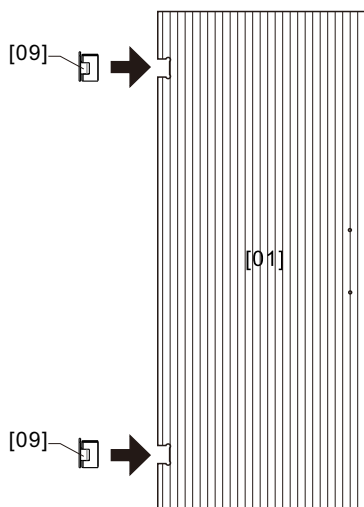


03







View from inside

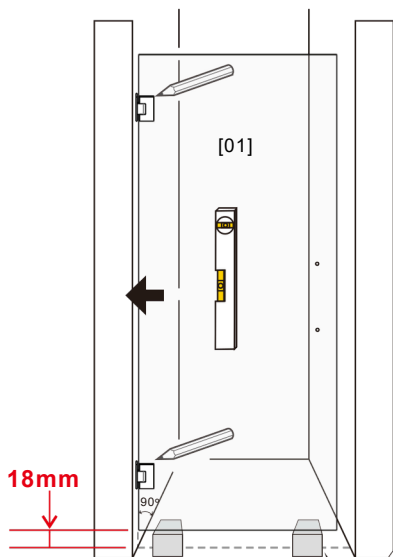


2X

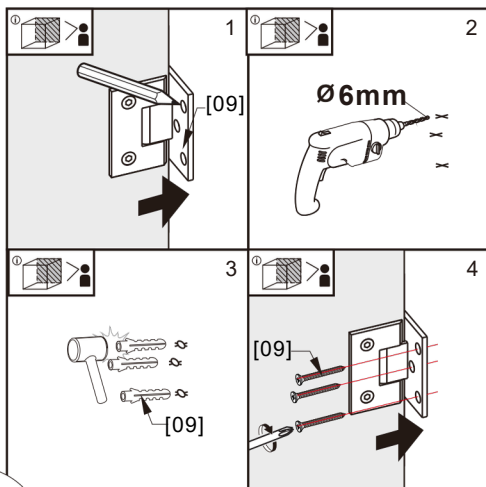

04



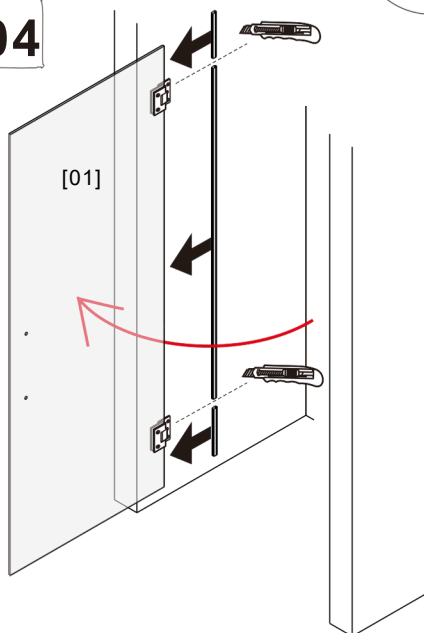


05


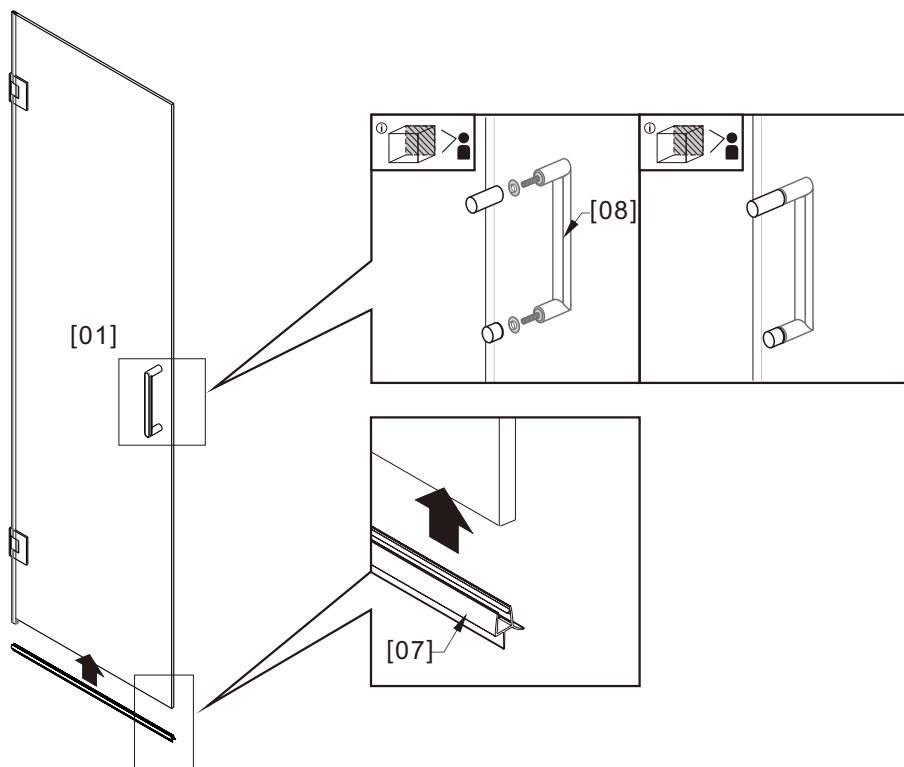


Adjustment to accommodate the desired angle is done after the door is installed. Loosen the Allen set screws and turn the door to the desired position, then tightening the Allen screws.





Caution: The adjustment angle must not exceed $\pm 15^\circ$

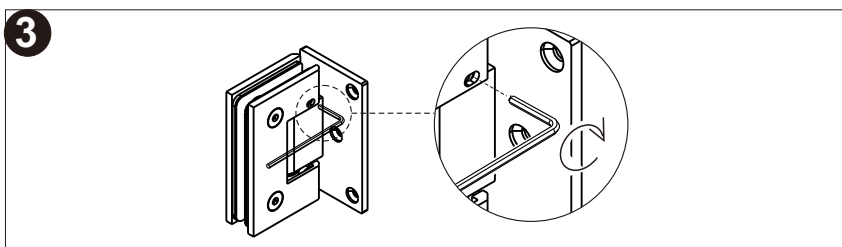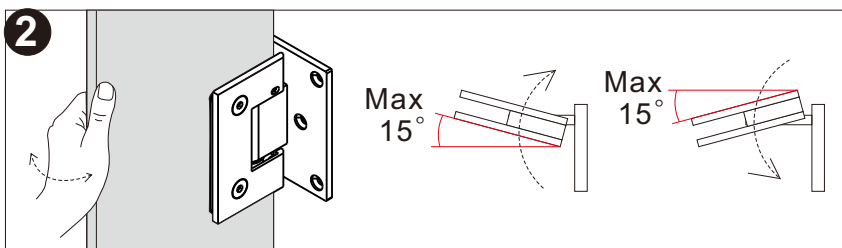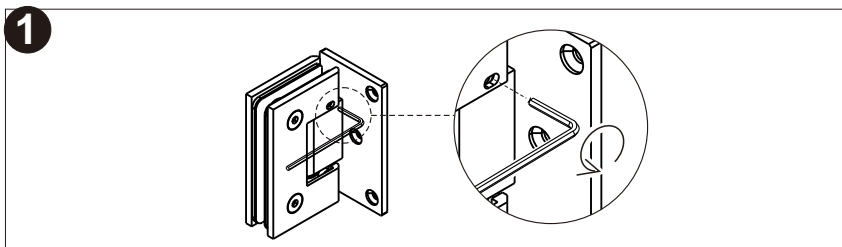






07

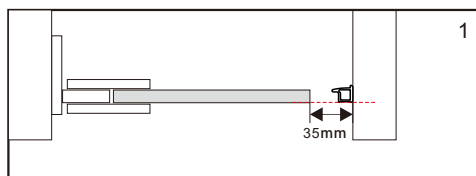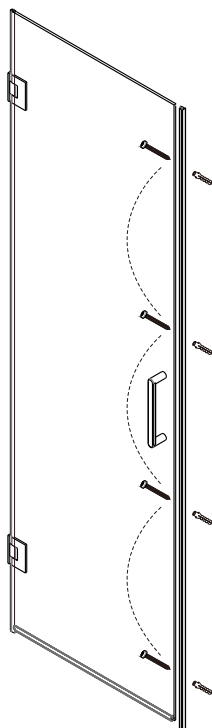





4x




08

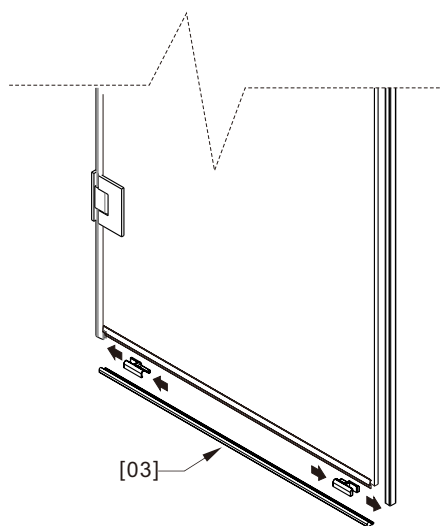



09

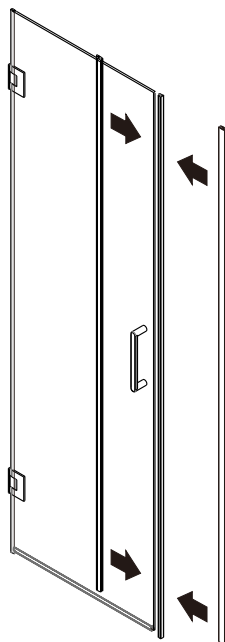


10

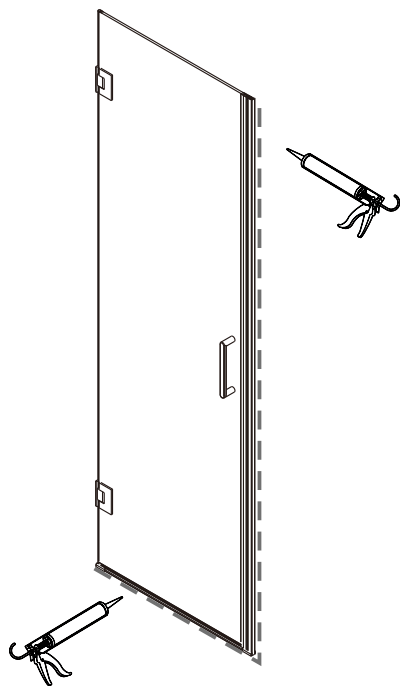


Recessed Shower Door with bulb seal


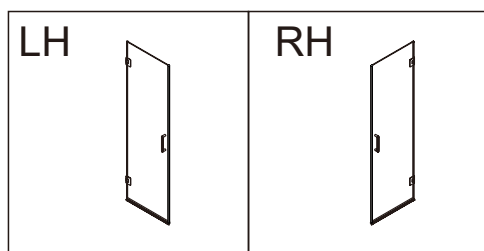
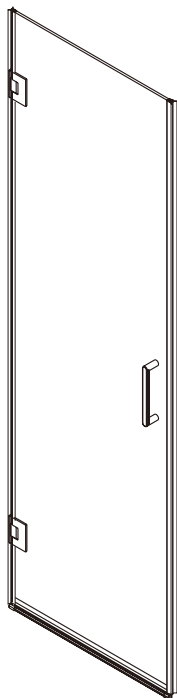


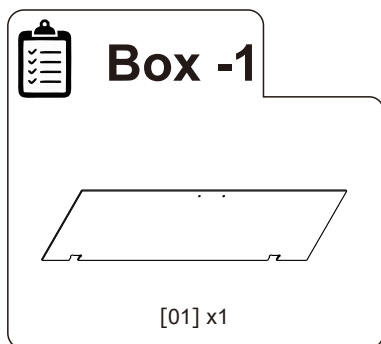


OR

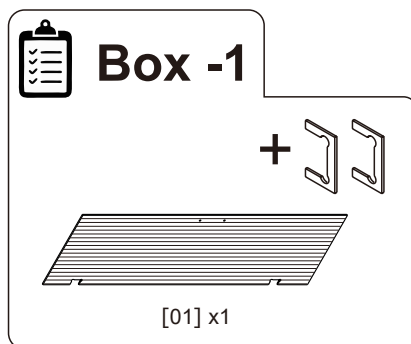

⊗ Not used for recessed shower door with bulb seal assembly

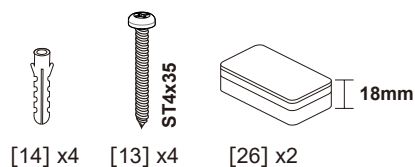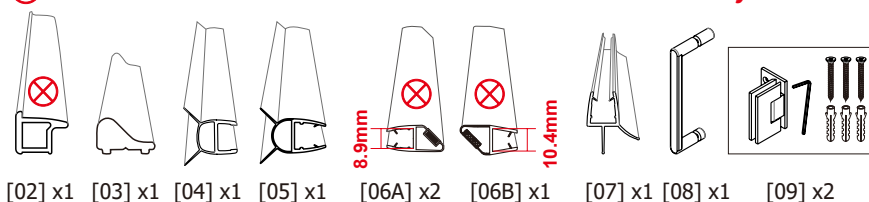


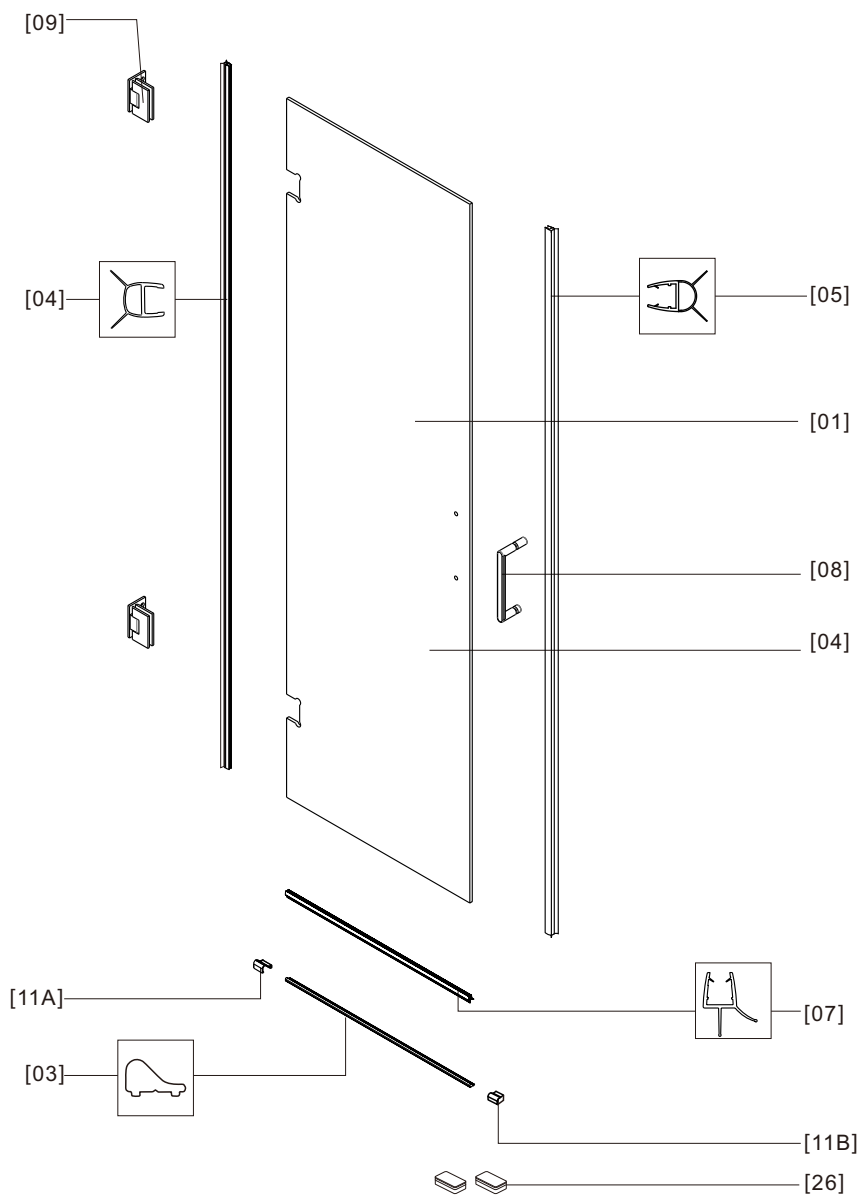




01


Size (mm)	L	
	Min.	Max.
600	572	572
700	672	672
800	772	772
900	872	872
1000	972	972

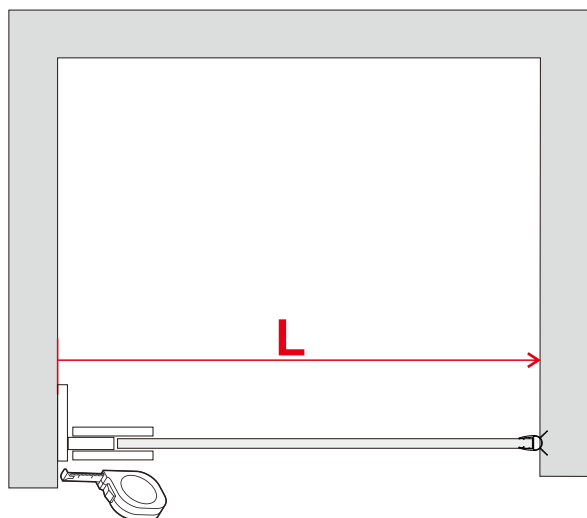



02

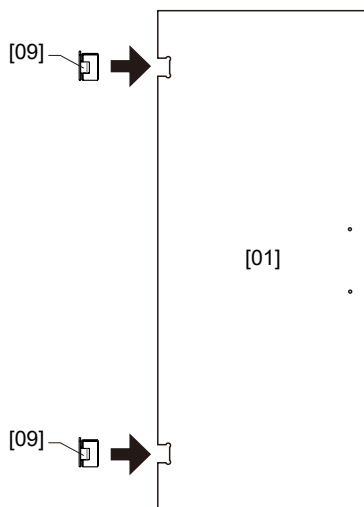

2x

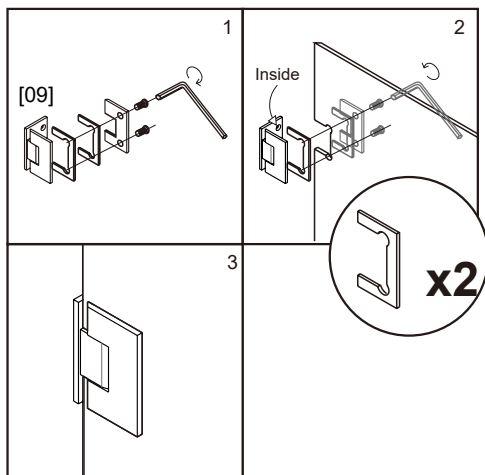


OR

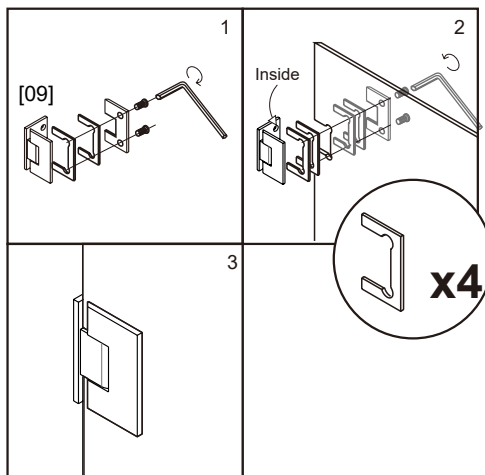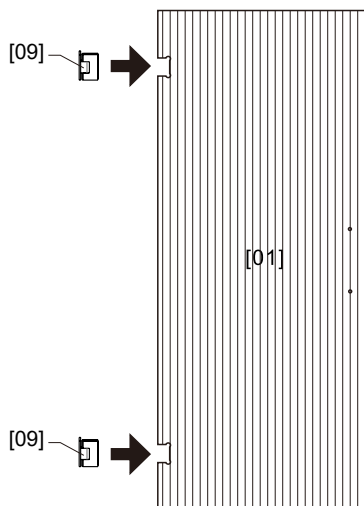


03



 View from inside

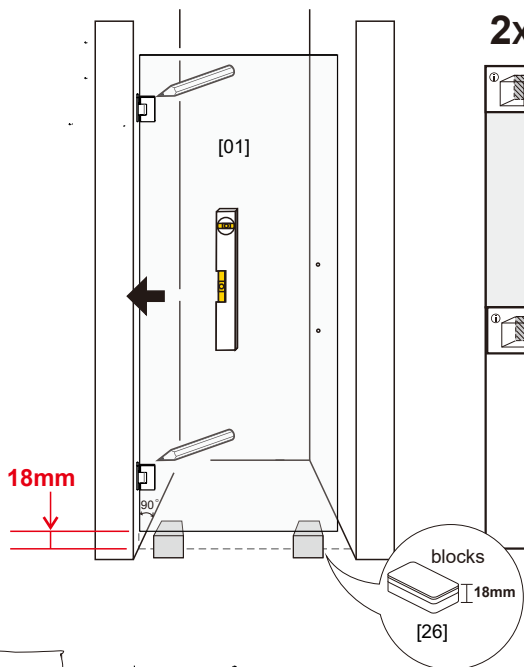


2x

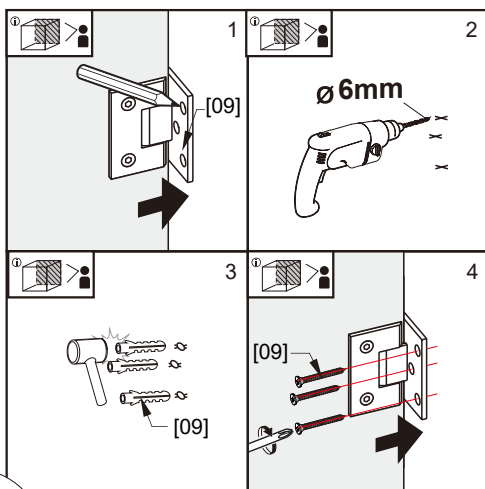

04


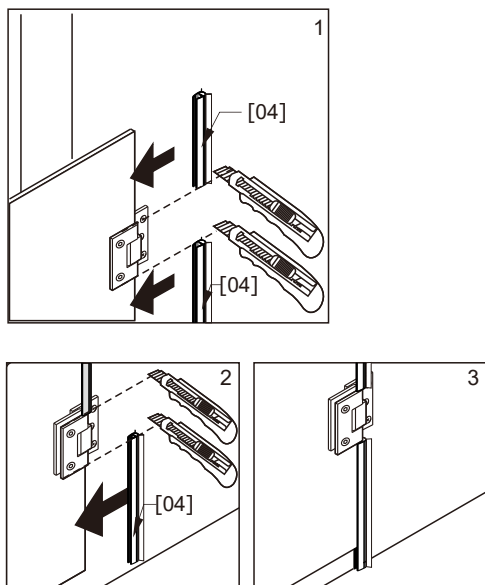
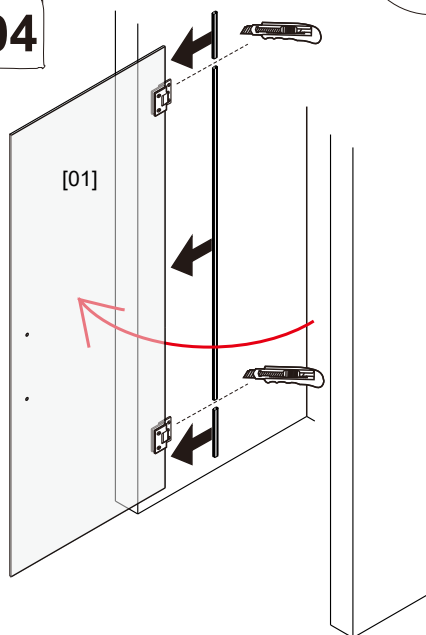


05





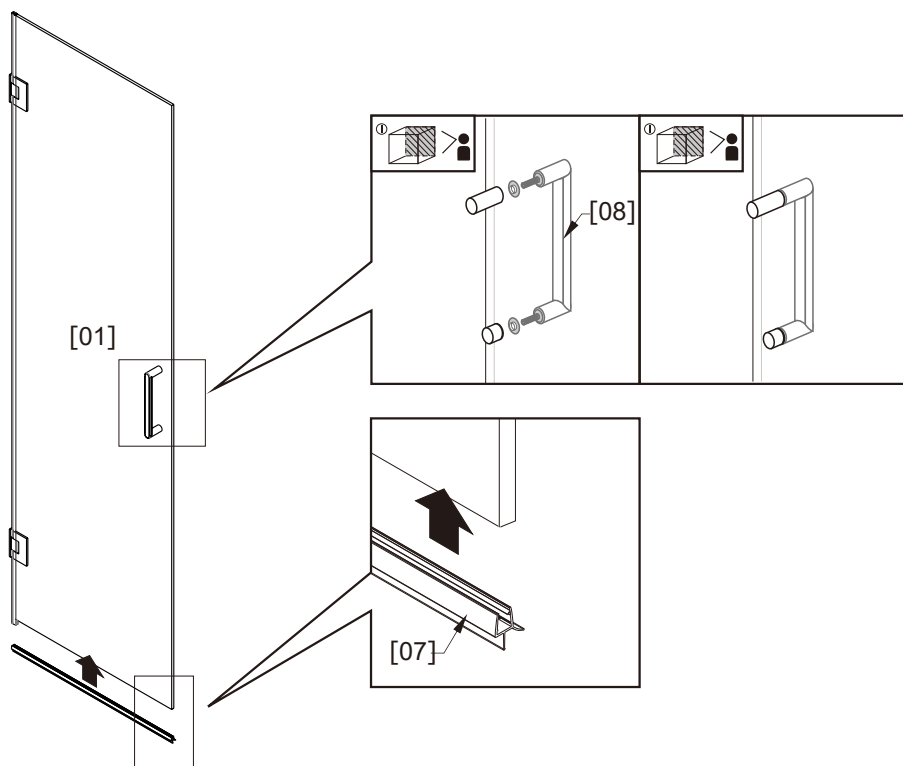


Adjustment to accommodate the desired angle is done after the door is installed. Loosen the Allen set screws and turn the door to the desired position, then tightening the Allen screws.


Caution: The adjustment angle must not exceed $\pm 15^\circ$

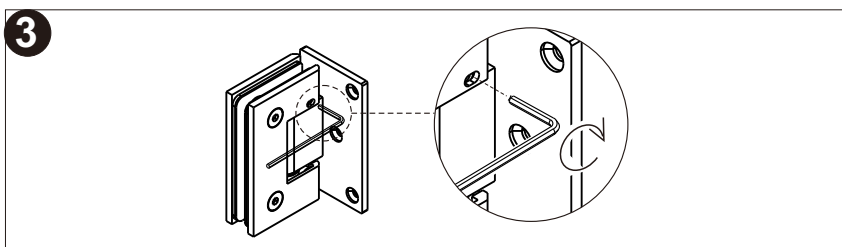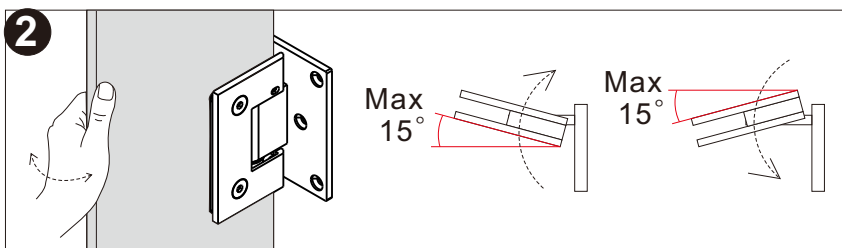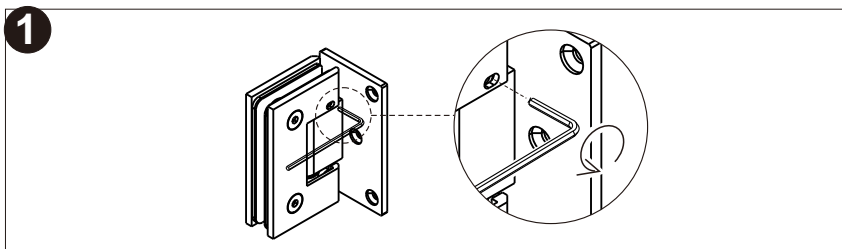

07

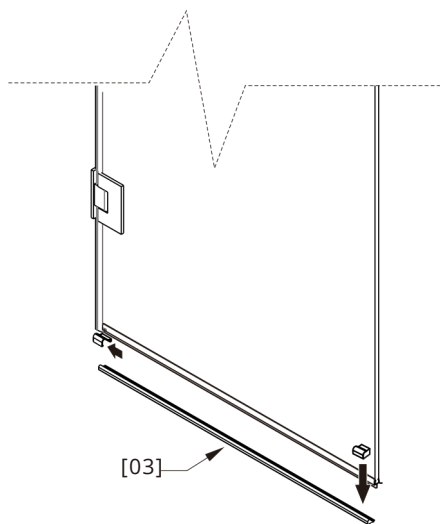

08

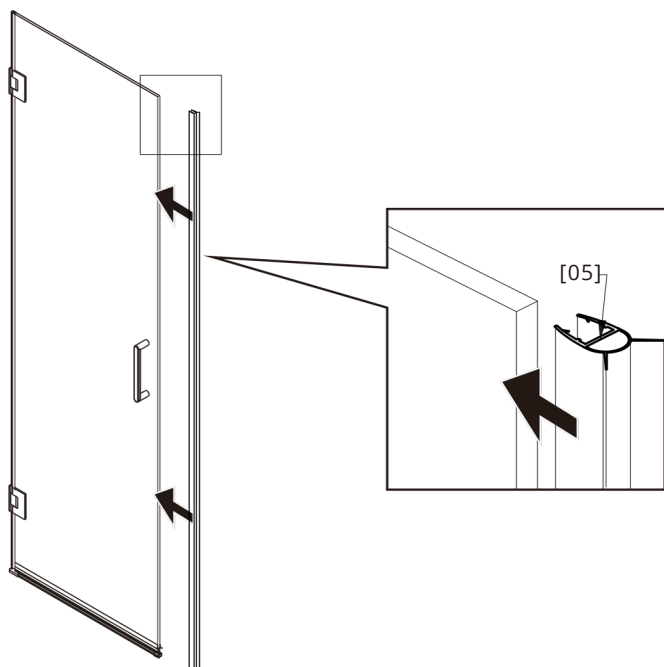

09

