

INSTALLATION INSTRUCTIONS FOR IP44 ILLUMINATED MIRRORS



Before installing this product pay special attention to these instructions. It is recommended that this product is installed by a qualified electrician and current building regulations. These products can safely be fitted into Zone 2. See lighting regulations diagram.

1. Prior to commencing work isolate the power supply cable at the fuse box.
2. Check that there are no other concealed cables or pipe work in the intended installation area (check the entire area).
3. The mirror is mounted on the wall by means of two fixing screws.
4. Make sure that it is at the correct height and level. Using a suitable marker through the fixing holes mark the position of the holes on the wall.
5. Using the correct size drill bit for the wall fixing (please note that for certain wall types i.e. plasterboard walls, the wall fixings supplied are not recommended) drill holes in the marked locations. Place the rawl plugs into the holes. Secure using the correct fixings.
6. Then use desired plug and connect with the three-core exposed wires with those reserved on the wall.
7. Fix the mirror to the wall.
8. Finally, switch on the power, then wave your hand in front of the sensor to test the product.

Cleaning Instructions

In order to maintain the quality finish of this product please do not use any abrasives or solvents when cleaning this product. Use only a damp cloth for cleaning this product.

Do not allow water to stand on any part of the mirror.

Please clean any spillage that may affect the quality of the finish as described above.



SANICLASS

Operation & installation information

Heated De-mister Pad

This mirror comes with a demister pad, which heats the surface of the mirror above room temperature removing the mist on surface.

IR Sensor


The IR sensor switch can be used to perform multiple functions:

Wave hands in front of sensor to change led color or turn lights on/off. The Demister is also controlled (turns On/Off) along with lights.

When the lights are on, placing hands in-front of sensor can change brightness of light.

Package content

- LED Backlit Mirror
- Screws
- Manual

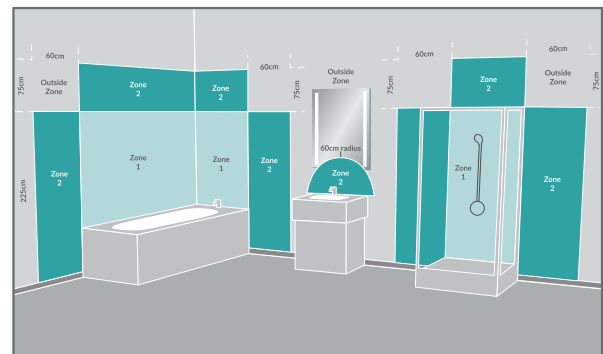

Attention: installation and connection to electric wiring must be done by a professional electrician in compliance with local requirements for electrical installations.

Never modify the construction or add any parts which are not offered as spare parts or accessories by the manufacturer of the luminaire. Any unauthorized modification might result in weak mounting and risk that parts of the luminaire can fall down from the wall.


Warning: Always switch off the Electrical supply at the mains during installation and maintenance.

Note: Install the mirror at least 15 cm. away from the basin.




Installation Steps

1

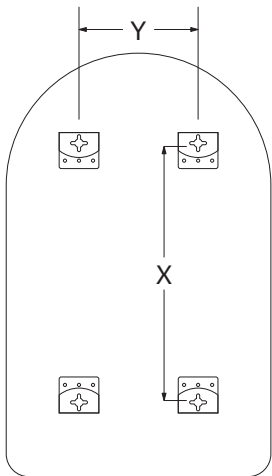


Vertical (Y) or horizontal (X)
suspension


2

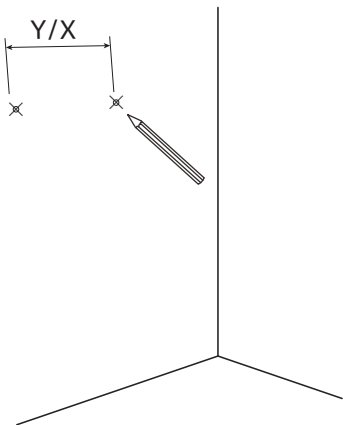


3

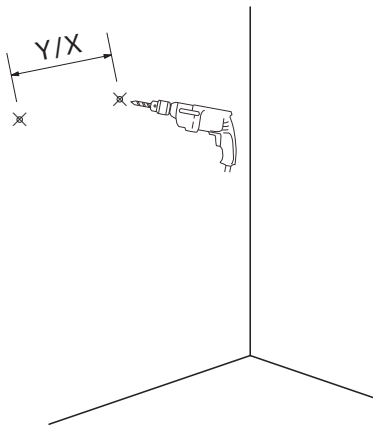


4

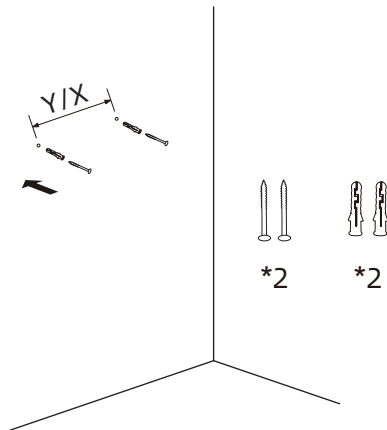


5



6

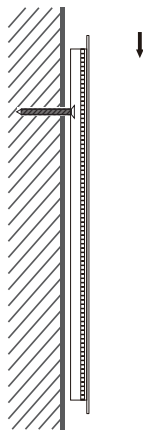

Electrical Wiring

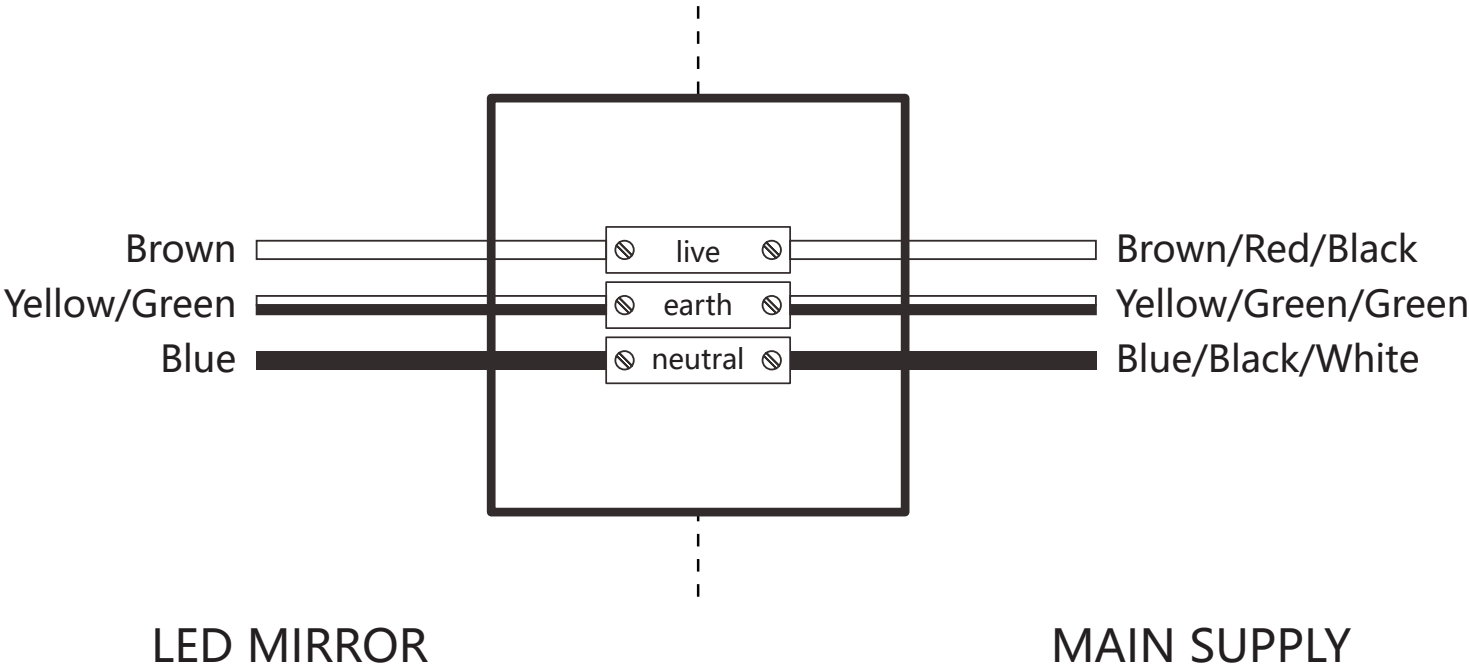

Special Care

Care Should be exercised when cleaning this product. Although its finish is extremely durable, it can be damaged by harsh abrasives and cleaning pads. To clean, use a light, non-abrasive cleaning solution or cleaning polish.

