

Fortifura Calvi Slim Washbasin Tap 17.4cm

INSTALLATION INSTRUCTIONS




Before You Begin

All information is based on the latest product information available at the time of publication. We reserve the right to make changes in product characteristics, packaging, or availability at any time without notice. Please leave these instructions for the consumer — they contain important information.

1. Flush the water supply pipes thoroughly to remove debris.
2. If possible, install this faucet before installing the lavatory.
3. Inspect the supply tubing for damage and leakage. Replace and maintain as necessary.
4. Observe local plumbing codes.
5. Shut off the water supplies to the fitting.

Installation — How to Install the Faucet

1. Connect the screw rod to the faucet body. Place the faucet body and plinth on top of the counter.
2. Insert the brass fastening screw and rubber seal onto the inlet hoses.
3. Insert the hoses into the faucet body under the counter.
4. Fasten the screw to the screw rod using a tool.
5. Connect the other end of the hoses to the angle valves. When facing the front of the faucet, the left hose should be connected to the hot water supply, and the right hose to the cold water supply.

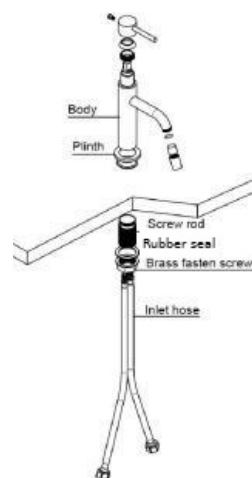

Handle Operation

Lift the handle gently. Turn clockwise for hot water, turn counter-clockwise for cold water.

Installation Checkout

1. Ensure that all connections are tight and the handle is in the off position.
2. Open the drain. Turn on the main water supply and check for leaks. Repair as required.
3. Remove the aerator by hand. Turn on the faucet handle and run hot and cold water through the spout for about one minute to remove any debris.
4. Remove any debris from the aerator. Shut off the faucet and reinstall the aerator.



Cleaning Instructions

All finishes: Clean the finish with mild soap and warm water. Wipe the entire surface completely dry with a clean, soft cloth.

Avoid: Cleaners containing chemicals such as ammonia, chlorine, or toilet cleaner can adversely affect the finish and are not recommended. Do not use abrasive cleaners or solvents on faucets and fittings.